

# CS-10i



## 10" Multipurpose Passive Loudspeaker



## Quick Start Guide

**CS-10i** is, out of the box, a true power-density delight, providing unexpectedly deep LF response with no additional adjustments or DSP processing required. **CS-10i** features a variety of options for wall-mount configurations with dedicated installation accessories, as well as a pole mount for AV portable applications. **CS-10i** clearly represents a boost on the qualities of **CS-10** and greater (almost doubled) output power packaged into a trapezoidal enclosure.

Featuring premium European high-efficiency transducers, **CS-10i** HF assembly integrates a 1,75" compression driver coupled with an asymmetrical (80°V/60°H) horn and the LF section features a 400 W AES 10" woofer with a front firing port. A dedicated, specially designed passive crossover maximizes the electroacoustic performance of the transducers and delivers a balanced, coherent response from 50 Hz with an optimum full-range audio reproduction with no additional processing.

The NL-4 connectors rear panel is housed within the handle space, protecting the connexions and allowing for installing the loudspeaker closer to the walls.



The excellent power-to size ratio, the high-quality audio reproduction and the stylish design cabinet with durable finish makes it a perfect solution for permanent installations, A/V and mobile applications. Both as full-range close-field FGM or BGM in open spaces or medium to large rooms, **CS-10i** provides sufficient LF response without subwoofer reinforcement adding optimized performance-to-investment value.

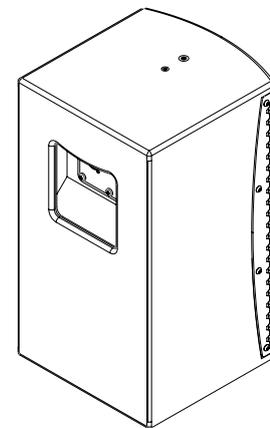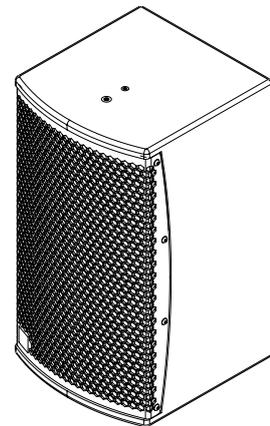

### OPTIONAL INSTALLATION ACCESSORIES

**CS-10i** is fitted with 10 threaded M8 inserts for vertical/horizontal hung permanent installations as well as bottom 36 mm pole-mount socket that serves for both pole mount configurations onto a **LF** Series subwoofer and for wall-mount installations with the dedicated optional accessory.

Dedicated U-Bracket accessories are also available for horizontal wall-mount installations. Instal de accesorry on the wall, fix the loudspeaker with M8 bolts into the lateral inserts and lock the desired angulation with M6 bolts into one of the 25 diferent positions.

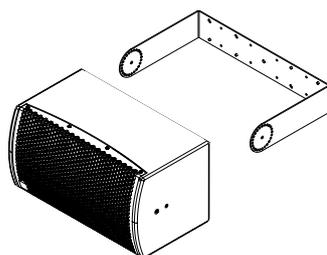

CS-10i optional installation accessories




## TECHNICAL DATA

<b>Enclosure design</b>	Trapezoidal · Bass-Reflex
<b>HF Transducer</b>	1 x 10" Woofer
<b>LF Transducer</b>	1 x 1.75" / 1" Exti Compression Driver
<b>RMS Power Handling *</b>	400 W
<b>Nominal Impedance</b>	8 Ohm
<b>SPL (Continuous/Peak)</b>	125/131 dB SPL
<b>Frequency Range (-10 dB)</b>	50 - 18000 Hz
<b>Frequency Range (-3 dB)</b>	75 - 17000 Hz
<b>Coverage</b>	80° x 60°
<b>Dimensions (WxHxD)</b>	285 x 512 x 312 mm (11,2 x 20,2 x 12,3 inch)
<b>Weight</b>	17 kg (37,5 lbs)
<b>Connectors</b>	2 x Neutrik speakON® NL-4 in parallel
<b>+/- 1</b>	Full-Range Signal
<b>+/- 2</b>	parallel Signal
<b>Cabinet Construction</b>	15 mm Plywood
<b>Grille</b>	1.5 mm perforated weatherised steel with protective foam
<b>Finish</b>	Aquaforce high-resistance paint coating process
<b>Handles</b>	1 integrated rear handle
<b>Installation</b>	2 x M8 + 2 x M6 threaded inserts
<b>Accessories</b>	Horizontal U-Bracket (UB-CS10i-H) Wall mount accessory (WM)

\* IEC filtered pink noise with a 6dB crest factor, 2 hours.

\*\* Frequency range values for recommended factory presets.

## TECHNICAL DRAWINGS

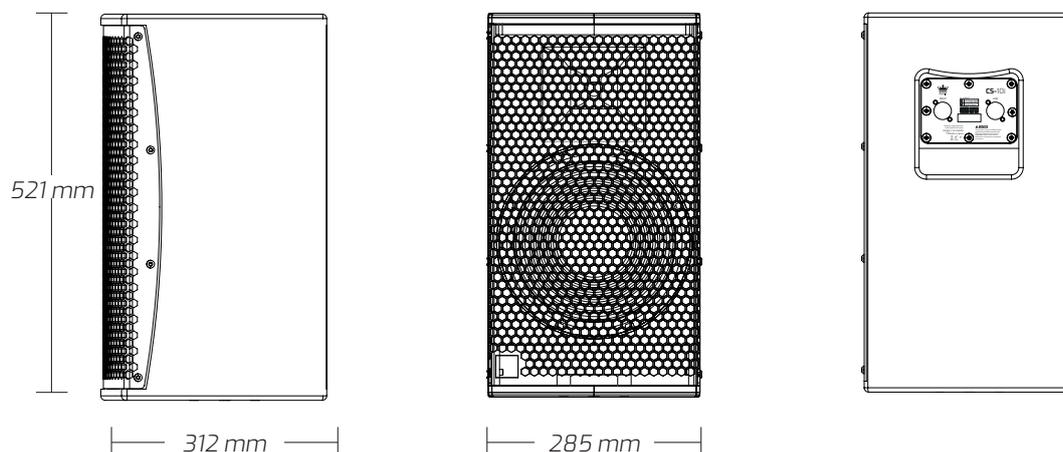

## WARNINGS AND SAFETY GUIDELINES

- Read this document thoroughly, follow all safety warnings and keep it for future reference.
- The exclamation mark inside a triangle indicates that whatever repairing and component replacement operations must be done by qualified and authorized personnel.
- No user serviceable parts inside.
- Only use accessories tested and approved by DUTCH ACOUSTICS and supplied by the manufacturer or an authorized dealer.
- Installations, rigging and suspension operations must be done by qualified personnel.
- Only use accessories specified by DUTCH ACOUSTICS, complying with maximum loads specifications and following local safety regulations.
- Read the specifications and connection instructions before proceeding to connect the system and use only cabling supplied or recommended by DUTCH ACOUSTICS. Connection of the system should be done by qualified personnel.
- Professional sound reinforcement systems can deliver high SPL levels that may result in hearing damage. Do not stand close to the system while in use.
- Loudspeakers produce magnetic field even while they are not in use or even when disconnected. Do not place or expose loudspeakers to any device that is sensitive to magnetic fields such as television monitors or data storage magnetic material.
- Disconnect the equipment during lightning storms and when it is not to be used for a long time.
- Do not expose this device to rain or moisture.
- Do not place any objects containing liquids, such as bottles or glasses, on the top of the unit. Do not splash liquids on the unit.
- Clean with a wet cloth. Do not use solvent-based cleaners.
- Regularly check the loudspeaker housings and accessories for visible signs of wear and tear, and replace them when necessary.
- Refer all servicing to qualified service personnel.
- This symbol on the product indicates that this product should not be treated as household waste. Follow local regulation for recycling of electronic devices.
- DUTCH ACOUSTICS declines any responsibility from misuse that may result in malfunction or damage of the equipment.

## WARRANTY

- All DUTCH ACOUSTICS products are guaranteed against any manufacturing defect for a period of 5 years from date of purchase for acoustical parts and 2 years from date of purchase for electronic devices.
- The guarantee excludes damage from incorrect use of the product.
- Any guarantee repair, replacement and servicing must be exclusively done by the factory or any of authorized service centres.
- Do not open or intend to repair the product; otherwise servicing and replacement will not be applicable for guarantee repair.
- Return the damaged unit, at shipper's risk and freight prepaid, to the nearest service centre with a copy of the purchase invoice in order to claim guarantee service or replacement.

## DECLARATION OF CONFORMITY

MADE IN EUROPE

*CS-10i Complies with the following EU Directives:  
RoHS (2002/95/CE) Restriction of Hazardous Substances  
LVD (2006/95/CE) Low Voltage Directive  
EMC (2004/108/CE) Electro-Magnetic Compatibility  
WEEE (2002/96/CE) Waste of Electric and Electronic Equipment  
EN 60065: 2002 Audio, video and similar electronic apparatus. Safety requirements.  
EN 55103-1: 1996 Electromagnetic compatibility: Emission  
EN 55103-2: 1996 Electromagnetic compatibility: Immunity*

