

XS-12i

2-Way Install Monitor



Quick Start Guide


XS-12i is a versatile, high-performance full range 2-way passive wedged monitor conceived for professional environments where portable sound reinforcement is required, delivering a superior audio reproduction in a convenient format.

XS-12i HF assembly couples a 3" compression driver into common **XS** Series birch plywood axisymmetric horn with DUTCH ACOUSTICS's proprietary design and a premium European, dedicated-design passive crossover filter provides a smooth, natural transition into the MLF 12" woofer and summing up into a full-range superior audio playback along the whole usable frequency range.

Like all DUTCH ACOUSTICS models, **XS-12i** is built with 15 and 18 mm birch plywood, Aquaforce waterproof paint coating and a high quality steel grille, creating a rugged, durable and stylish loudspeaker.



The 60° wedged cabinet allows not only to be used as FOH main system in small venues, bars and AV applications and as a stage monitor but to seamlessly fit into any wall mount fixed installation.

XS-12i integrates a bottom Pole Mount 35 mm socket to be configured on **LF** Series subwoofers for install applications in venues and clubs.

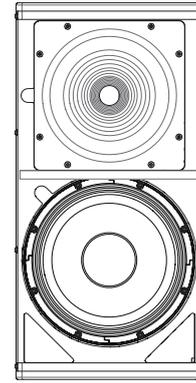

INSTALLATION ACCESSORIES

XS-12i is fitted with threaded M8 inserts for hung permanent installations and (optional) dedicated U-Brackets and Wall-Mount accessories are available for seamless integration in any space.

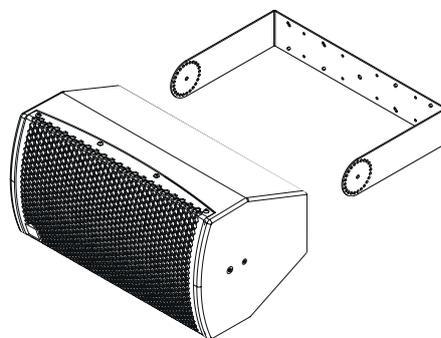

Examples showing
installation options for **XS-12i**


TECHNICAL DATA

Enclosure design	Wedged cabinet (55°) - Bass-Reflex
LF Transducers	1 x 12" High performance woofer
HF Transducers	3" Voice coil Compression Driver (1.4 Exit, 120 mm magnet)
RMS Power Handling*	500 W
Nominal Impedance	8 Ohm
SPL (Continuous/Peak)	122/128 dB SPL
Frequency Range (-10 dB)	55 - 23000 Hz
Frequency Range (-3 dB)	69 - 21000 Hz
Coverage	80° Axisymmetric
Dimensions (WxHxD)	336 x 681 x 361 mm (13,2 x 26,8 x 14,2 inch)
Weight	23,5 kg (51,8 lbs)
Connectors	2 x Neutrik speakON® NL-4 in Parallel
+/-1	Input
+/-2	Link
Cabinet Construction	15 + 18 mm Birch Plywood
Grille	1.5 mm perforated weatherised steel with protective foam
Finish	Aquaforce High Resistance paint coating process
Handles	2 integrated handles
Installation	2 x M8 + 2 x M6 threaded inserts.
Accessories	U-Bracket (UB-XS12i-H) Wall-Mount Accessory (WM-01)

* IEC filtered pink noise with a 6dB crest factor, 2 hours.

** Frequency range values for recommended factory presets.

TECHNICAL DRAWINGS

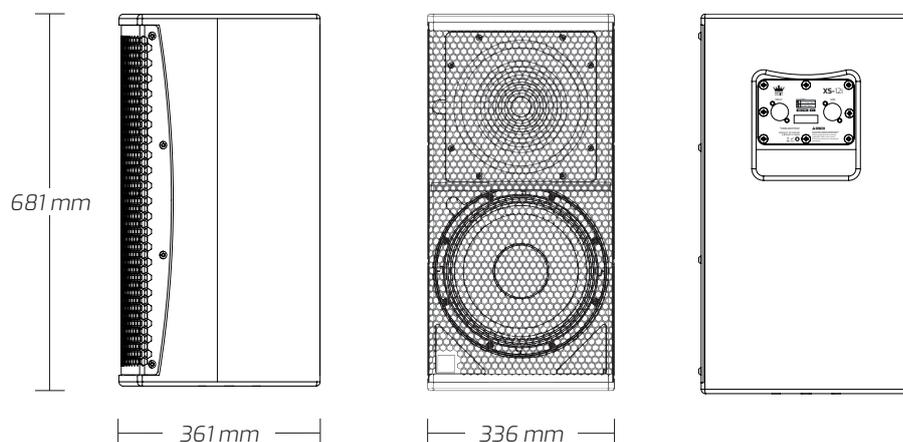

WARNINGS AND SAFETY GUIDELINES



- Read this document thoroughly, follow all safety warnings and keep it for future reference.
- The exclamation mark inside a triangle indicates that whatever repairing and component replacement operations must be done by qualified and authorized personnel.
- No user serviceable parts inside.
- Only use accessories tested and approved by DUTCH ACOUSTICS and supplied by the manufacturer or an authorized dealer.
- Installations, rigging and suspension operations must be done by qualified personnel.
- Only use accessories specified by DUTCH ACOUSTICS, complying with maximum loads specifications and following local safety regulations.



- Read the specifications and connection instructions before proceeding to connect the system and use only cabling supplied or recommended by DUTCH ACOUSTICS. Connection of the system should be done by qualified personnel.
- Professional sound reinforcement systems can deliver high SPL levels that may result in hearing damage. Do not stand close to the system while in use.



- Loudspeakers produce magnetic field even while they are not in use or even when disconnected. Do not place or expose loudspeakers to any device that is sensitive to magnetic fields such as television monitors or data storage magnetic material.
- Disconnect the equipment during lightning storms and when it is not to be used for a long time.
- Do not expose this device to rain or moisture.
- Do not place any objects containing liquids, such as bottles or glasses, on the top of the unit. Do not splash liquids on the unit.
- Clean with a wet cloth. Do not use solvent-based cleaners.
- Regularly check the loudspeaker housings and accessories for visible signs of wear and tear, and replace them when necessary.
- Refer all servicing to qualified service personnel.



- This symbol on the product indicates that this product should not be treated as household waste. Follow local regulation for recycling of electronic devices.
- DUTCH ACOUSTICS declines any responsibility from misuse that may result in malfunction or damage of the equipment.

WARRANTY

- All DUTCH ACOUSTICS products are guaranteed against any manufacturing defect for a period of 5 years from date of purchase for acoustical parts and 2 years from date of purchase for electronic devices.
- The guarantee excludes damage from incorrect use of the product.
- Any guarantee repair, replacement and servicing must be exclusively done by the factory or any of authorized service centres.
- Do not open or intend to repair the product; otherwise servicing and replacement will not be applicable for guarantee repair.
- Return the damaged unit, at shipper's risk and freight prepaid, to the nearest service centre with a copy of the purchase invoice in order to claim guarantee service or replacement.

DECLARATION OF CONFORMITY

MADE IN EUROPE

***XS-12i** Complies with the following EU Directives:*

RoHS (2002/95/CE) Restriction of Hazardous Substances

LVD (2006/95/CE) Low Voltage Directive

EMC (2004/108/CE) Electro-Magnetic Compatibility

WEEE (2002/96/CE) Waste of Electric and Electronic Equipment

EN 60065: 2002 Audio, video and similar electronic apparatus. Safety requirements.

EN 55103-1: 1996 Electromagnetic compatibility: Emission

EN 55103-2: 1996 Electromagnetic compatibility: Immunity



DUTCH ACOUSTICS is always in pursuit of better performance, greater reliability and design features.
Technical specifications and minor finish details may vary without notice in order to improve our products.